



PRODUCT NAME: RECYCLED RUBBER BARRIER, LOAD RATED

SIZE: 6FT/8FT x 32IN x 24IN

WEIGHT: 1675 LBS (6FT), 2250 LBS (8FT)

MATERIAL: RECYCLED CRUMB RUBBER

MAX LOAD:

6FT - 25,000LBS

8FT - 32,000LBS

MAX POINT LOAD:

150 PSI




AVAILABLE OPTIONS:

- MOUNTED REFLECTORS  
(VARIOUS COLORS AND SIZES)
- SEE PAGE 3 FOR ACCESSORIES



DENSE AND DURABLE  
ENVIRONMENTALLY FRIENDLY  
MOVEABLE WITH FORKLIFT  
EASY TO TRANSPORT AND RELOCATE

95% RECYCLED MATERIAL  
LEACHATE/UV TESTED TO EPA 1311,  
SW846-351, SW846-827OD


PATENTED AND PATENT PENDING

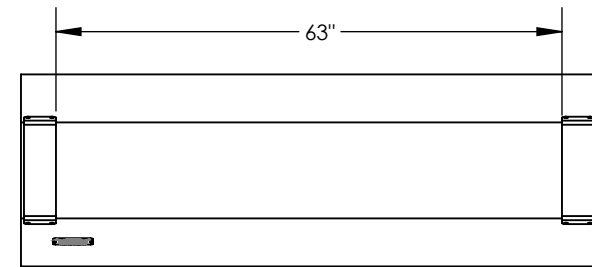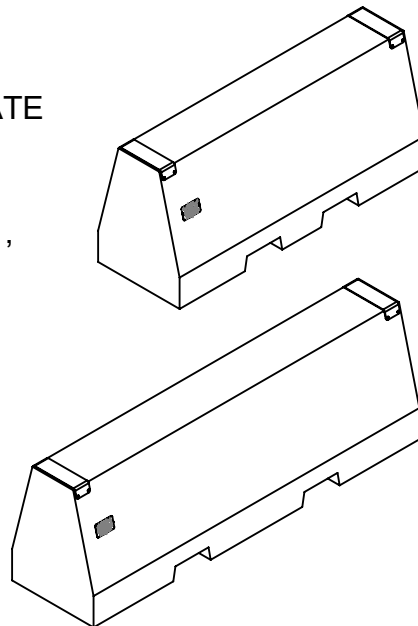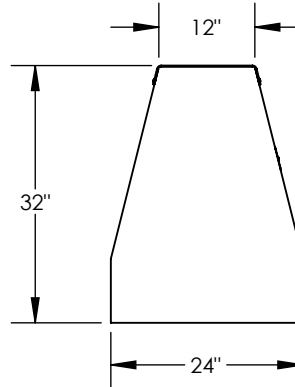



TOP VIEW

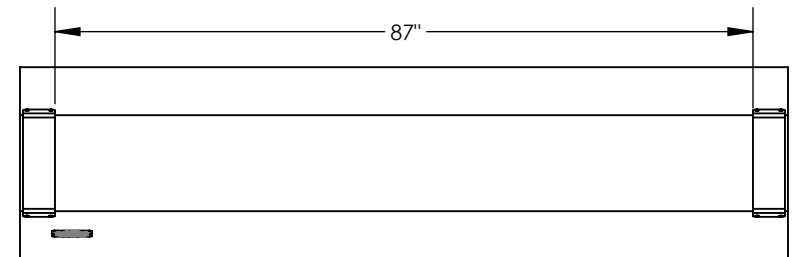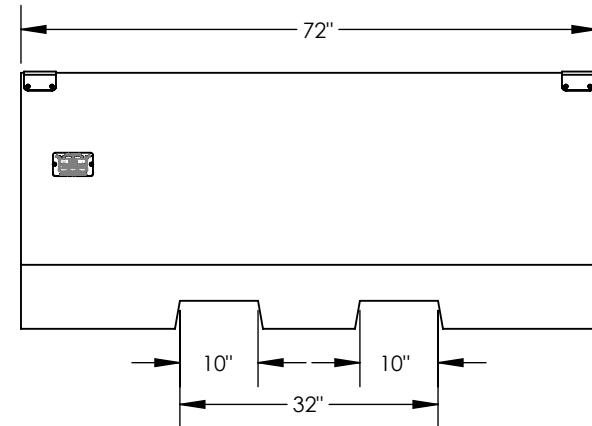


TOP VIEW

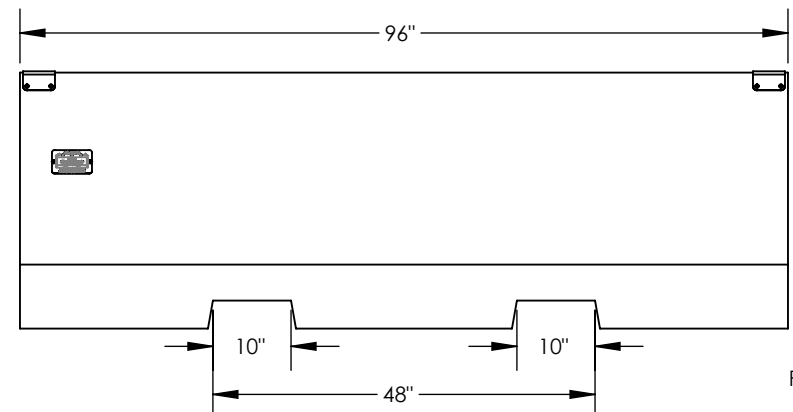


| ITEM NO. | QTY | DESCRIPTION                       |
|----------|-----|-----------------------------------|
| 1        | 1   | PRETRED LOAD RATED BARRIER        |
| 2        | 2   | LOAD RATED BARRIER KEEP OUT STRIP |
| 3        | 1   | LOAD RATING TAG                   |
| 4        | 10  | #8-1IN FLANGED HEAD WOOD SCREWS   |

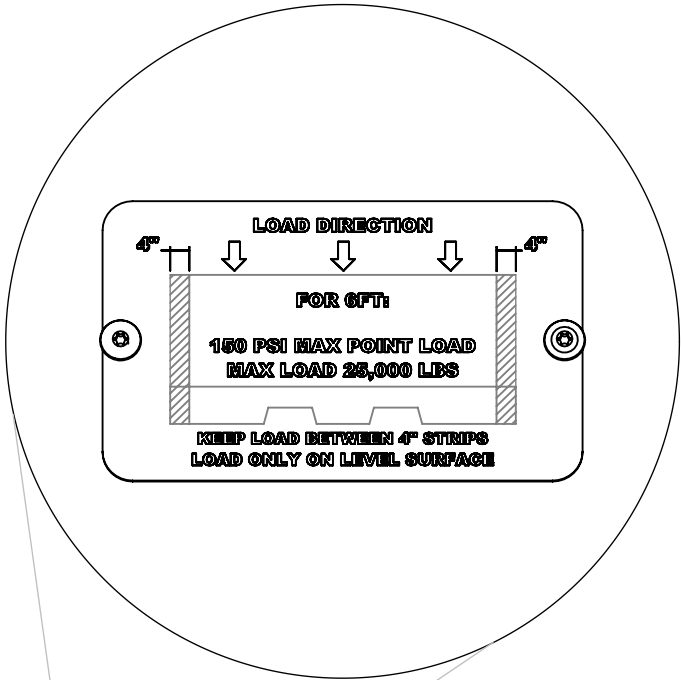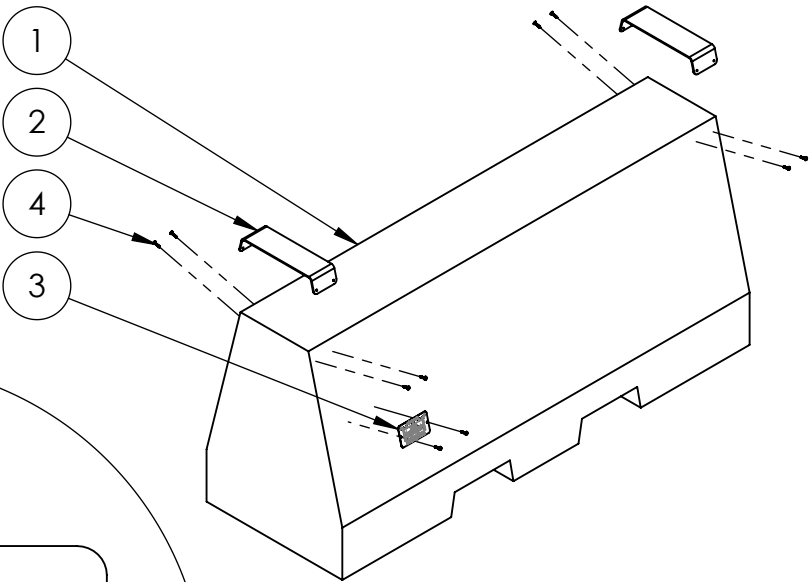


DETAIL A

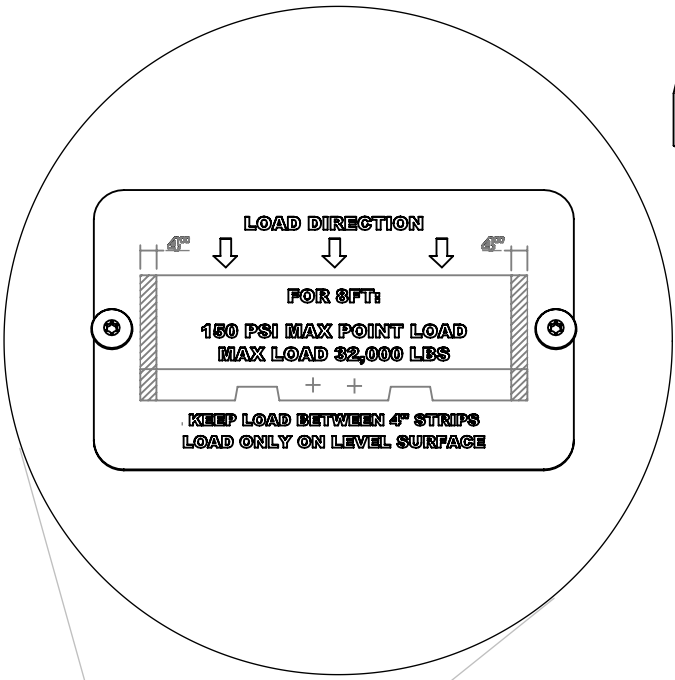

DETAIL B

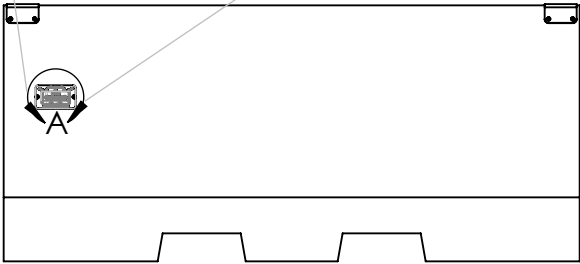

6FT BARRIER

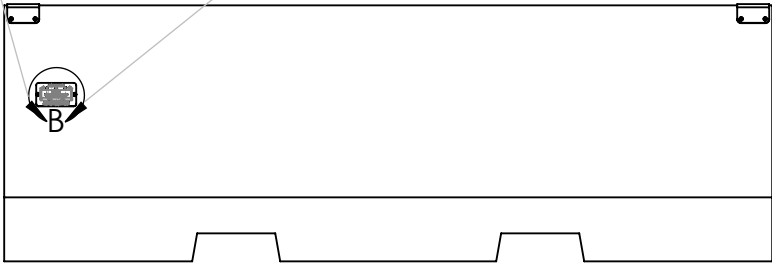


8FT BARRIER

| ITEM NO. | QTY    | DESCRIPTION                         |
|----------|--------|-------------------------------------|
| 1        | 2 OR 6 | #5 GALVANIZED REBAR CONNECTOR       |
| 2        | 8      | #8-3IN FLANGED HEAD WOOD SCREWS     |
| 3        | 2      | 16 GAUGE GALVANIZED FORK SLOT ARMOR |



**\*OPTIONAL ACCESSORIES**

**STRAPPING CONFIGURATION**  
(SHOWN WITH FORK SLOT ARMOR)

LOAD ATTACHED USING RATCHET STRAP WITH 2" WIDE WEBBING, 3,333LB LOAD RATING


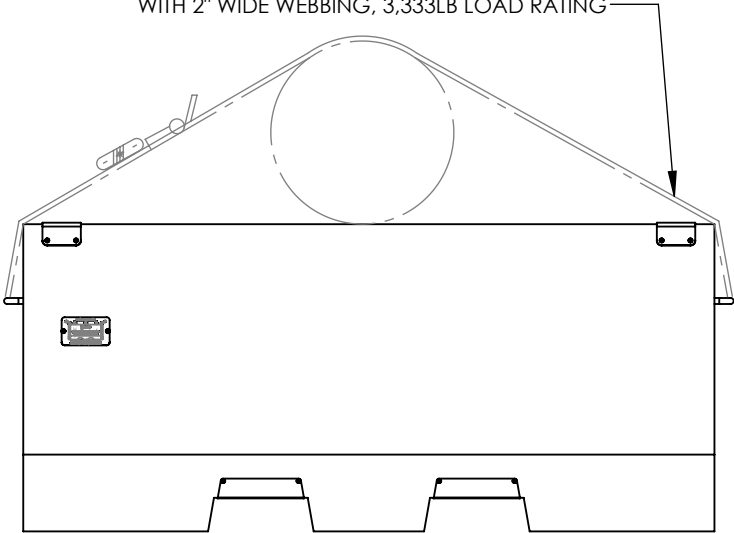


2X OR 6X 1

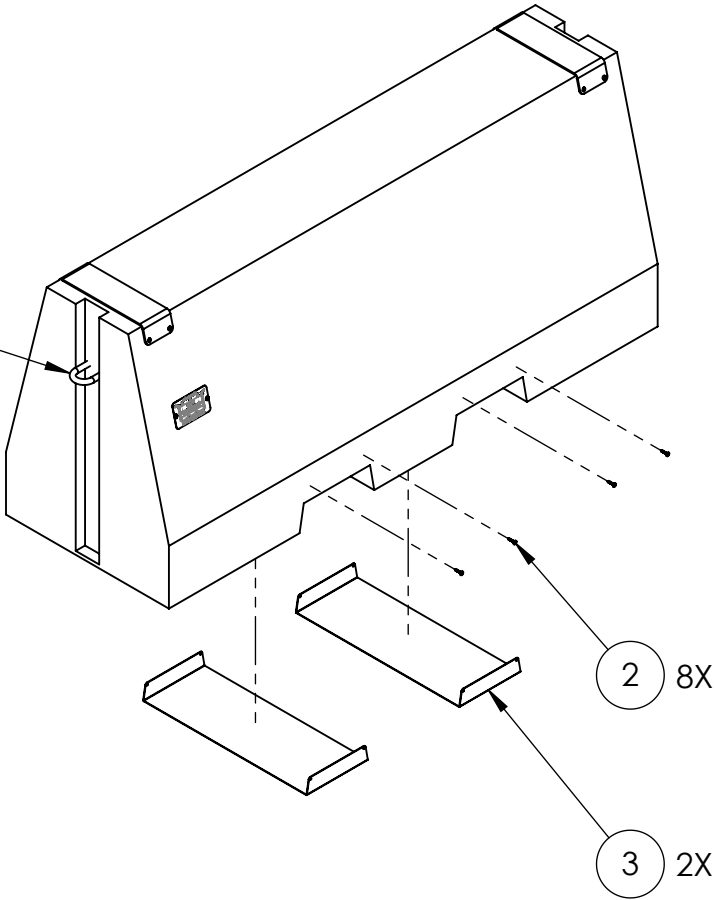

**ROLL OFF PREVENTION CONFIGURATION**  
(SHOWN WITH FORK SLOT ARMOR)

POSTS INSERTED THROUGH REBAR CONNECTORS TO PROTECT LOAD FROM ROLLING OFF BARRIER ALSO ALLOWS FOR STRAPPING

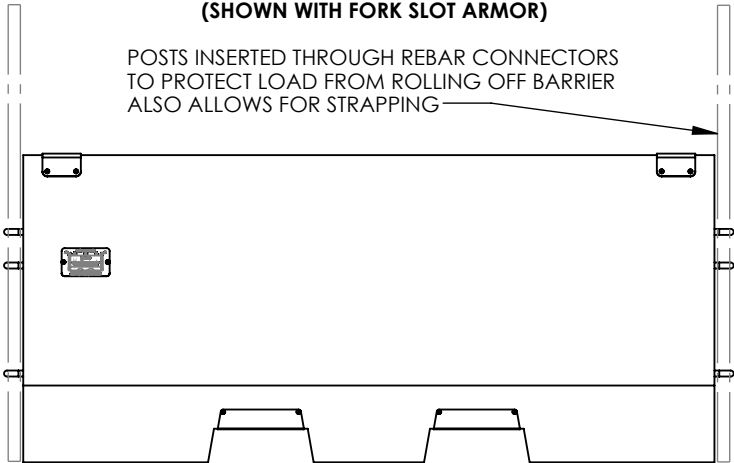

\*ACCESSORIES SHOWN ON 6FT PRODUCT CAN ALSO BE SPECIFIED FOR 8FT PRODUCT